




GREENCROP

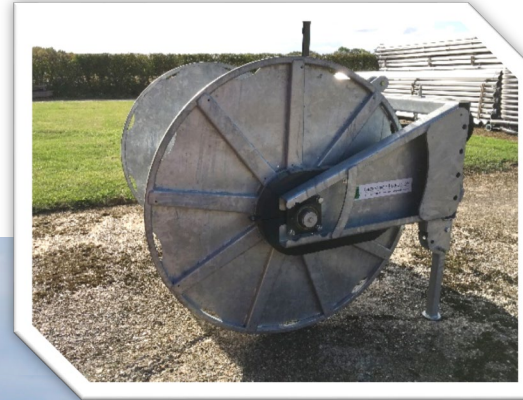

Layflat hose reelers & spreading distributors

Front mounted reeler

Greencrop front mounted bobbing reelers are fully galvanised with a round centre, new generation hydraulic motor, 1" chain and 3pt and standard female A frame coupling. Sizes from 600, 800 and 1000m.



Trailing shoe

Greencrop trailing shoes are fully galvanised with blue tipped shoes, robust rubber boot and 3 point linkage. The trailing shoes are fitted with self-sharpening distributors with 50mm outlets and 225mm spacings. Sizes include 6.2m, 7.5m and 9m tractor mounted, plus 7m tanker mounted.



Trailed reeler

Greencrop trailed reelers are fully galvanised with round centre, comer gearbox drive, hydraulic brakes, tool box and twin nip roller. 550X55 R22.5 floatation tyres, rear direction valve and rear drawbar as standard. Sizes include 1000m, 1200m, 1500m and 2000m.



Dribble bars

Greencrop dribble bars are fully galvanised with vertical folding wings, self-sharpening distributors, 50mm outlets, Bauer inlet and support cage, and are flow meter ready. Sizes include 6m, 7m, 9m, 10.5m and 12m with other widths available on request. 6m and 7m tanker dribble bars are quick fit on the tanker rear door. A single distributor is present on 6m – 10.5m widths, while a twin distributor is present on 12m dribble bars.



Drop bobbin reeler

Greencrop drop bobbin reelers are fully galvanised with a round centre, new generation hydraulic motor, uprated 3 point linkage and standard female A frame coupling. Bobbin shafts are mechanical bearings enclosed in a housing for smooth running. The hose spool can drop out and fit in another. Sizes are 800m and 1000m; 800m units come with single motor drive, and 1000m units come with twin motor drive.



Rear-mounted Layflat hose reeler for clean water & slurry

Greencrop layflat hose reelers for clean water and slurry are designed to take the hard work out of hose laying and retrieval.

Developed over many years to give long and reliable operation, Greencrop reelers give you the features you need combined with heavy-duty construction and a powerful hydraulic drive.

Mounted reelers feature a high performance hydraulic drive, with cross line relief protection, and proportional control valves to give maximum efficiency and a long maintenance free life. The centre of the drum is formed from 400mm diameter x 10mm thick circular hollow section tubing that allows the hose to be wrapped around the tube tight without kinks.

Standard features:

- 1500m and 1800m trailed reelers
- 1200m, 1000m, 800m and 600m mounted reelers
- 600m single spool reeler
- 200m spools carrying 4" or 5" layflat hose
- Rear guide roller to prevent pipe twist
- Painted frame with CAT2 linkage
- Hydraulic drive operated from tractor cab
- Heavy duty construction



GREENCROP

Dereham Road, Beeston, King's Lynn, Norfolk PE32 2LE

Tel: 01328 701992

Fax: 01328 700111

Email: enquiries@greencrop.co.uk

www.greencrop.co.uk

Dealer stamp