

BRIAN JAMES TRAILERS

» Connected to you



CAR TRANSPORTER TRAILER
PRICE LIST
JANUARY 2021

UNITED KINGDOM

CONTENTS

- 04 CAR HAULER
- 06 C TRANSPORTER
- 08 A TRANSPORTER
- 10 T TRANSPORTER
- 12 RACE SHUTTLE 2 and 3
- 14 RACE SPORT
- 16 UNIVERSAL OPTIONS



All Brian James Trailers are fully approved to EEC Dir 2007/46.


BRIAN JAMES TRAILERS in association with

ALKO
QUALITY FOR LIFE



CAR HAULER

CAR HAULER STANDARD EQUIPMENT



| PRODUCT CODE | 145-1210 | 145-3210 |
|---|--------------|--------------|
| CAPACITY | | |
| Gross kg | 2,700 | 2,700 |
| Load kg | 2,169 | 2,131 |
| Unladen trailer weight kg | 531 | 569 |
| DIMENSIONS | | |
| Load bed length m A | 4.00 | 4.90 |
| Load bed width m B | 2.00 | 2.00 |
| Overall trailer length m C | 5.58 | 6.48 |
| Overall trailer width m D | 2.44 | 2.44 |
| Bed load height m (unladen with standard 12" wheels fitted) E | 0.43 | 0.43 |
| Towball height (loaded with standard 12" wheels fitted, centre of towball) m | 0.47 | 0.47 |
| RUNNING GEAR | | |
| Axles | 2 | 2 |
| Wheel / tyre size | 12" (155/70) | 12" (155/70) |
| Jockey wheel, serrated type, side clamped, central position | ● | ● |
| Steel spare wheel/tyre and carrier, chassis mounted | ● | ● |
| REAR LOADING | | |
| Low profile 1.7m loading ramps feature useful lifting handles for easy handling | ● | ● |
| EXTERIOR | | |
| Coloured body trim - Jet black | ● | ● |
| SECURITY | | |
| Cast steel coupling head + integral high security lock | ● | ● |
| TRAILER LIGHTING | | |
| 12V LED trailer lighting - front marker lamps, stop, tail, indicators and registration plate (fog and reverse lamps are roundpoint style 12V filament bulb) | ● | ● |
| WARRANTY | | |
| 5 year extended chassis warranty | ● | ● |
| DELIVERY | | |
| Delivery to a UK dealer | ● | ● |
| PRICE | | |
| £ ex vat | 2,289 | 2,449 |

CAR HAULER


OPTIONAL EQUIPMENT

| | £ ex vat |
|--|----------|
| WHEELS | |
| Alloy wheels – 5x (12" Style B2 - Silver) + safety locking wheel bolts | 350 |
| Alloy wheels – 5x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts | 620 |
| WINCHES | |
| Manually operated winch with steel cable, auto-brake mechanism and roller guide | 290 |
| OPERATION | |
| Hydraulic tilt-bed operation for lowest loading angle | 530 |
| LOADING OPTIONS | |
| Lightweight assistor ramps – ultra low loading facility (pair) | 110 |
| Rear support stands, side clamped drop down type (for use with non-tilting beds only) | 80 |
| STORAGE | |
| Tyre storage and transport rack - high level rack with securing system and locking cable | 450 |
| LOAD RESTRAINT | |
| Wheel chocks (pair) bolted adjustable positions - lower profile designed for sports cars | 80 |

See page 16 for details of additional security, safety and load restraint options which are available on all of our ranges.

C TRANSPORTER


STANDARD EQUIPMENT

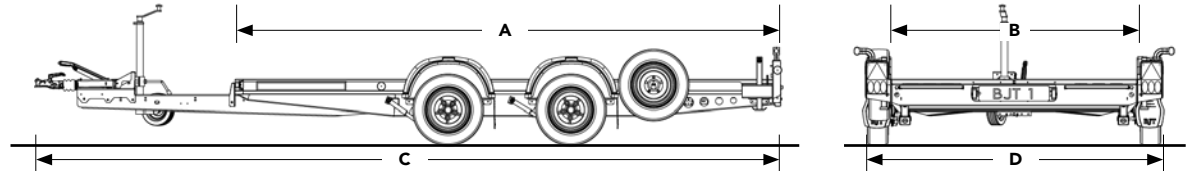

| PRODUCT CODE | 126-1011 | 126-1111 | 126-1211 | 126-1221 | 126-2002 | 126-2012 | 126-2112 | 126-2213 | 126-2223 | 126-2323 | 126-2423 |
|---|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| CAPACITY | | | | | | | | | | | |
| Gross kg | 1,500 | 1,500 | 1,500 | 1,500 | 2,000 | 2,000 | 2,000 | 2,600 | 2,600 | 2,600 | 2,600 |
| Load kg | 1,060 | 1,010 | 973 | 968 | 1,445 | 1,425 | 1,388 | 1,970 | 1,955 | 1,930 | 1,905 |
| Unladen trailer weight kg | 440 | 490 | 527 | 532 | 555 | 575 | 612 | 630 | 645 | 670 | 695 |
| DIMENSIONS | | | | | | | | | | | |
| Load bed length m A | 2.70 | 3.20 | 3.70 | 3.70 | 3.30 | 3.30 | 3.70 | 4.00 | 4.00 | 4.50 | 5.00 |
| Load bed width m B | 1.80 | 1.80 | 1.80 | 2.00 | 1.70 | 1.80 | 1.80 | 1.80 | 2.00 | 2.00 | 2.00 |
| Overall trailer length m C | 4.18 | 4.68 | 5.18 | 5.18 | 4.72 | 4.72 | 5.18 | 5.48 | 5.48 | 5.98 | 6.48 |
| Overall trailer width m D | 2.18 | 2.18 | 2.18 | 2.38 | 2.08 | 2.18 | 2.18 | 2.18 | 2.38 | 2.38 | 2.38 |
| Bed load height m | 0.42 | 0.42 | 0.42 | 0.42 | 0.42 | 0.42 | 0.42 | 0.42 | 0.42 | 0.42 | 0.42 |
| Towball height (loaded, centre of towball) m | 0.40 | 0.40 | 0.40 | 0.40 | 0.40 | 0.40 | 0.40 | 0.40 | 0.40 | 0.40 | 0.40 |
| RUNNING GEAR | | | | | | | | | | | |
| Wheel / tyre size | 12" (155/70) | 12" (155/70) | 12" (155/70) | 12" (155/70) | 12" (155/70) | 12" (155/70) | 12" (155/70) | 12" (155/70) | 12" (155/70) | 12" (155/70) | 12" (155/70) |
| Axles | 1 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Spare wheel | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Jockey wheel, side clamped, central position | ● | ● | ● | ● | — | — | — | — | — | — | — |
| Jockey wheel, standard duty serrated, side clamped, central position | — | — | — | — | ● | ● | ● | ● | ● | ● | ● |
| RAMPS | | | | | | | | | | | |
| High grip punched ramps 1.90m E | ● | ● | ● | ● | — | — | — | — | — | — | — |
| High grip punched ramps 2.40m E | — | — | — | — | ● | ● | ● | ● | ● | ● | ● |
| EXTERIOR | | | | | | | | | | | |
| Coloured body trim – Sargasso blue | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Flush fitting centre deck, featuring durable and strong anti-slip deck phenol ply | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| SECURITY | | | | | | | | | | | |
| Cast steel coupling head + integral high security lock | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| WARRANTY | | | | | | | | | | | |
| 5 year extended chassis warranty | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| DELIVERY | | | | | | | | | | | |
| Delivery to a UK dealer | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| PRICE | | | | | | | | | | | |
| £ ex vat | 1,879 | 1,999 | 2,119 | 2,119 | 2,609 | 2,609 | 2,719 | 2,829 | 2,829 | 2,939 | 3,109 |

C TRANSPORTER


OPTIONAL EQUIPMENT

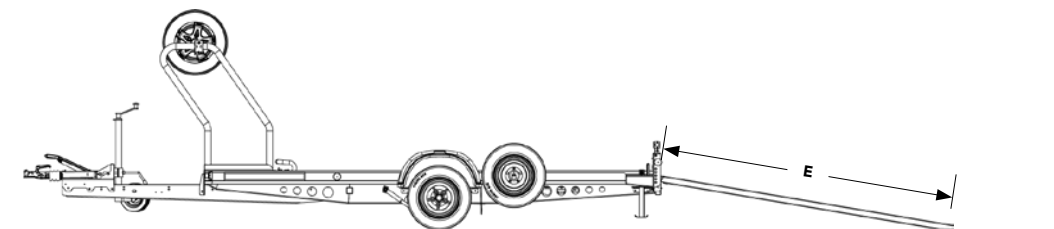

| WHEELS | £ ex vat |
|--|----------|
| Alloy wheels – 3x (12" Style B2 - Silver) + safety locking wheel bolts (for single axle models) | 220 |
| Alloy wheels – 3x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts (for single axle models) | 370 |
| Alloy wheels – 5x (12" Style B2 - Silver) + safety locking wheel bolts (for twin axle models) | 350 |
| Alloy wheels – 5x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts (for twin axle models) | 620 |
| WINCHES | |
| Manually operated winch 2 speed + 3 point adjustable pull position | 260 |
| Manually operated winch with steel cable, auto-brake mechanism and multi-point pulley guide | 330 |
| 12V 4,500lb electric operation winch with steel wire cable, roller fairlead and remote control (note: cannot be fitted in conjunction with storage box) available on twin axle models only | 520 |
| Portable power pack for 4,500lb electric winch, with charger and Anderson twin pin plug connector | 260 |
| LOADING OPTIONS | |
| Rear support stands | 130 |
| DECKING | |
| Deck slick pads x4, red - protect soft compound racing tyres from the punched deck | 100 |
| STORAGE | |
| Fuel can storage box, lockable, twin opening doors for 1, 2 or 3 x 20 litre jerry cans – available in Sargasso blue | 190 |
| High level tyre storage and transport rack with securing system and locking cable | 450 |
| LOAD RESTRAINT | |
| Wheel chock, bolted to bed, optional positions - lower profile designed for sports cars | 90 |
| Wheel chocks, pair (red), quick release and fully adjustable, professional system engages into trailer chassis | 110 |

See page 16 for details of additional security, safety and load restraint options which are available on all of our ranges.


A TRANSPORTER STANDARD EQUIPMENT

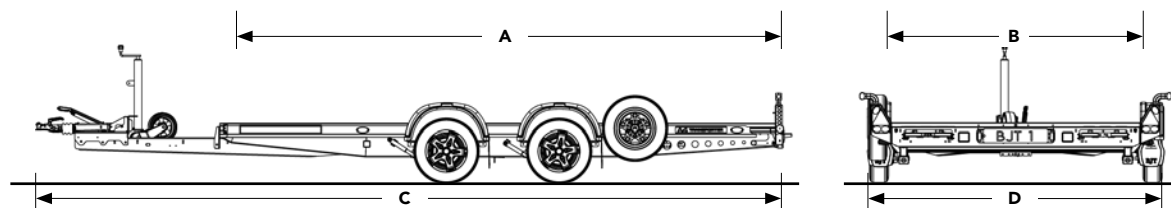

| PRODUCT CODE | 125-1011 | 125-1111 | 125-1211 | 125-1312 | 125-2002 | 125-2112 | 125-2213 | 125-2223 | 125-2323 | 125-2324 | 125-2423 | 125-2424 |
|--|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| CAPACITY | | | | | | | | | | | | |
| Gross kg | 1,500 | 1,500 | 1,500 | 1,500 | 2,000 | 2,000 | 2,600 | 2,600 | 2,600 | 3,000 | 2,600 | 3,000 |
| Load kg | 1,060 | 1,010 | 973 | 955 | 1,445 | 1,388 | 1,970 | 1,955 | 1,930 | 2,320 | 1,905 | 2,295 |
| Unladen trailer weight kg | 440 | 490 | 527 | 545 | 555 | 612 | 630 | 645 | 670 | 680 | 695 | 705 |
| DIMENSIONS | | | | | | | | | | | | |
| Load bed length m A | 2.70 | 3.20 | 3.70 | 4.00 | 3.30 | 3.70 | 4.00 | 4.00 | 4.50 | 4.50 | 5.00 | 5.00 |
| Load bed width m B | 1.80 | 1.80 | 1.80 | 2.00 | 1.70 | 1.80 | 1.80 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Overall trailer length m C | 4.24 | 4.74 | 5.24 | 5.53 | 4.77 | 5.24 | 5.54 | 5.54 | 6.04 | 6.04 | 6.54 | 6.54 |
| Overall trailer width m D | 2.18 | 2.18 | 2.18 | 2.38 | 2.08 | 2.18 | 2.18 | 2.38 | 2.38 | 2.38 | 2.38 | 2.38 |
| Bed load height m | 0.42 | 0.42 | 0.42 | 0.42 | 0.42 | 0.42 | 0.42 | 0.42 | 0.42 | 0.42 | 0.42 | 0.42 |
| Towball height (loaded, centre of towball) m | 0.40 | 0.40 | 0.40 | 0.40 | 0.40 | 0.40 | 0.40 | 0.40 | 0.40 | 0.40 | 0.40 | 0.40 |
| RUNNING GEAR | | | | | | | | | | | | |
| Wheel / tyre size | 12" (155/70) | 12" (155/70) | 12" (155/70) | 12" (155/70) | 12" (155/70) | 12" (155/70) | 12" (155/70) | 12" (155/70) | 12" (155/70) | 12" (155/70) | 12" (155/70) | 12" (155/70) |
| Axles | 1 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Spare wheel | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Jockey wheel, heavy duty serrated type, side clamped, central position | ● | ● | ● | ● | — | — | — | — | — | — | — | — |
| Jockey wheel, heavy duty auto-retractable | — | — | — | — | ● | ● | ● | ● | ● | ● | ● | ● |
| REAR LOADING | | | | | | | | | | | | |
| High grip punched, glide out ramps 1.90m E | ● | ● | ● | ● | — | — | — | — | — | — | — | — |
| High grip punched, glide out ramps 2.40m E | — | — | — | — | ● | ● | ● | ● | ● | ● | ● | ● |
| Rear stands with foot pedal action, gas spring operation | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| STORAGE | | | | | | | | | | | | |
| Bed locker, front, automatic lift | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| EXTERIOR | | | | | | | | | | | | |
| Body trim – available in Sargasso blue, Poppy red, Arcelor anthracite or Jet black | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Flush fitting centre deck, featuring durable and strong anti-slip deck phenol ply | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| SECURITY | | | | | | | | | | | | |
| Cast steel coupling head + integral high security lock | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| WARRANTY | | | | | | | | | | | | |
| 5 year extended chassis warranty | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| DELIVERY | | | | | | | | | | | | |
| Delivery to a UK dealer | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| PRICE | | | | | | | | | | | | |
| £ ex vat | 2,319 | 2,479 | 2,649 | 2,689 | 3,149 | 3,289 | 3,419 | 3,419 | 3,549 | 3,709 | 3,629 | 3,819 |

A TRANSPORTER


OPTIONAL EQUIPMENT

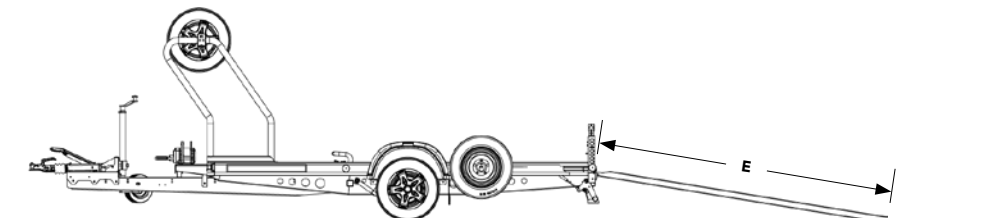

| WHEELS | £ ex vat |
|--|----------|
| Alloy wheels – 3x (12" Style B2 - Silver) + safety locking wheel bolts (for single axle models) | 220 |
| Alloy wheels – 3x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts (for single axle models) | 370 |
| Alloy wheels – 5x (12" Style B2 - Silver) + safety locking wheel bolts (for twin axle models) | 350 |
| Alloy wheels – 5x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts (for twin axle models) | 620 |
| WINCHES | |
| Manually operated winch 2 speed + 3 point adjustable pull position | 260 |
| Manually operated winch with steel cable, auto-brake mechanism and multi-point pulley guide | 330 |
| 12V 4,500lb electric operation winch with steel wire cable, roller fairlead and remote control (note: cannot be fitted in conjunction with storage box) available on twin axle models only | 520 |
| Portable power pack for 4,500lb electric winch, with charger and Anderson twin pin plug connector | 260 |
| DECKING | |
| Deck slick pads x4, red - protect soft compound racing tyres from the punched deck | 100 |
| STORAGE | |
| Fuel can storage box, lockable, twin opening doors for 1, 2 or 3 x 20 litre jerry cans – available in Sargasso blue, Poppy red, Arcelor anthracite or Jet black | 190 |
| High level tyre storage and transport rack with securing system and locking cable | 450 |
| LOAD RESTRAINT | |
| Wheel chock, bolted to bed, optional positions - lower profile designed for sports cars | 90 |
| Wheel chocks, pair (red), quick release and fully adjustable, professional system engages into trailer chassis | 110 |

See page 16 for details of additional security, safety and load restraint options which are available on all of our ranges.

T TRANSPORTER STANDARD EQUIPMENT

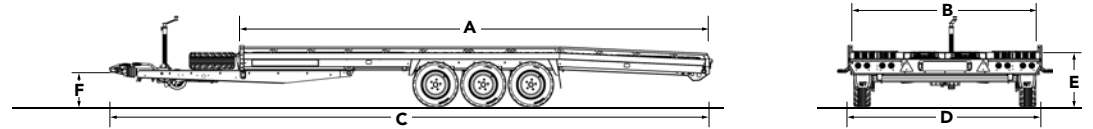

| PRODUCT CODE | 230-5442 | 230-5443 | 230-6443 | 230-5452 | 230-5453 | 230-5463 | 230-6452 | 230-6453 | 230-6462 | 230-6463 | 230-6552 | 230-6553 | 230-6562 | 230-6563 |
|---|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| CAPACITY | | | | | | | | | | | | | | |
| Gross kg | 3,500 | 3,500 | 3,500 | 3,500 | 3,500 | 3,500 | 3,500 | 3,500 | 3,500 | 3,500 | 3,500 | 3,500 | 3,500 | 3,500 |
| Load kg | 2,670 | 2,665 | 2,615 | 2,668 | 2,663 | 2,650 | 2,618 | 2,612 | 2,605 | 2,601 | 2,618 | 2,612 | 2,605 | 2,601 |
| Unladen trailer weight kg | 830 | 835 | 885 | 832 | 837 | 850 | 882 | 888 | 895 | 899 | 882 | 888 | 895 | 899 |
| DIMENSIONS | | | | | | | | | | | | | | |
| Load bed length m A | 5.00 | 5.00 | 5.50 | 5.00 | 5.00 | 5.00 | 5.50 | 5.50 | 5.50 | 5.50 | 5.50 | 5.50 | 5.50 | 5.50 |
| Load bed width m B | 2.07 | 2.22 | 2.22 | 2.07 | 2.22 | 2.22 | 2.07 | 2.22 | 2.07 | 2.22 | 2.07 | 2.22 | 2.07 | 2.22 |
| Overall trailer length m C | 6.56 | 6.56 | 7.07 | 6.56 | 6.56 | 6.56 | 7.07 | 7.07 | 7.07 | 7.07 | 7.07 | 7.07 | 7.07 | 7.07 |
| Overall trailer width m D | 2.13 | 2.28 | 2.28 | 2.13 | 2.28 | 2.28 | 2.13 | 2.28 | 2.13 | 2.28 | 2.13 | 2.28 | 2.13 | 2.28 |
| Bed load height m E | 0.64 | 0.64 | 0.64 | 0.61 | 0.61 | 0.64 | 0.61 | 0.61 | 0.64 | 0.64 | 0.61 | 0.61 | 0.64 | 0.64 |
| Tow-ball height (loaded) m F | 0.39 | 0.39 | 0.39 | 0.39 | 0.39 | 0.39 | 0.39 | 0.39 | 0.39 | 0.39 | 0.39 | 0.39 | 0.39 | 0.39 |
| RUNNING GEAR | | | | | | | | | | | | | | |
| Axles | 2 | 2 | 2 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| Wheel / tyre size | 12" (195/60) | 12" (195/60) | 12" (195/60) | 10" (195/55) | 10" (195/55) | 12" (195/60) | 10" (195/55) | 10" (195/55) | 12" (195/60) | 12" (195/60) | 10" (195/55) | 10" (195/55) | 12" (195/60) | 12" (195/60) |
| Spare wheel | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| EXTERIOR | | | | | | | | | | | | | | |
| Body trim - Sargasso blue, Poppy red, Arcelor anthracite or Jet black | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| LOADING | | | | | | | | | | | | | | |
| Tilt-bed - hydraulic operation | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ● | ● | ● | ● |
| Tail panel, full width | — | — | — | — | — | — | — | — | — | — | ● | ● | ● | ● |
| 1.8m rear ramps - (not available on tail panel equipped T6 trailers) | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | — | — | — | — |
| SECURITY | | | | | | | | | | | | | | |
| Cast steel coupling head + integral high security lock | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| WARRANTY | | | | | | | | | | | | | | |
| 5 year extended chassis warranty | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| DELIVERY | | | | | | | | | | | | | | |
| Delivery to a UK dealer | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| PRICE | | | | | | | | | | | | | | |
| £ ex vat | 3,959 | 4,249 | 4,629 | 4,549 | 4,839 | 4,899 | 4,919 | 5,209 | 4,959 | 5,259 | 5,389 | 5,689 | 5,429 | 5,739 |

T TRANSPORTER


OPTIONAL EQUIPMENT

| WHEELS | £ ex vat |
|--|----------|
| Alloy wheels – 5x (12" Style B2 - Silver, 5.5J) + safety locking wheel bolts (for twin axle models) | 680 |
| Alloy wheels – 5x (12" Style B2, 5.5J- Anthracite, diamond cut) + safety locking wheel bolts (for twin axle models) | 960 |
| Alloy wheels – 7x (10" Style B2 - Silver) + safety locking wheel bolts (for tri-axle models) | 480 |
| Alloy wheels – 7x (10" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts (for tri-axle models) | 870 |
| Alloy wheels – 7x (12" Style B2 - Silver, 5.5J) + safety locking wheel bolts (for tri-axle models) | 960 |
| Alloy wheels – 7x (12" Style B2, 5.5J- Anthracite, diamond cut) + safety locking wheel bolts (for tri-axle models) | 1,360 |
| WINCHES | |
| Manual winch kit, auto-braked + free spool - Includes central pulley system - not compatible with cross over loading ramps | 320 |
| Electric winch kit, 4500 lb drag capacity, 12V, wander lead remote control, no power system (see below for details of power pack) | 520 |
| HD electric winch kit, 8000lb drag capacity, 12V, wander lead remote control, no power system (see below for details of power pack) (not compatible with headboard or front cross-loading ramps) | 720 |
| Power pack, portable HD 12V for electric winch - supplied with quick coupling Anderson connectors | 260 |
| OPERATION | |
| Hydraulic tilt-bed operation (standard on tri-axle trailers with tail panel) | 530 |
| LOADING OPTIONS | |
| High grip punched ramps - rear, 2.3m (not available on tail panel equipped tri-axle trailers) | 60 |
| High grip punched cross over loading ramps - front, 1.8m (not available on tail panel equipped tri-axle trailers) | 300 |
| Lightweight assistor ramps (pair) – ultra low loading facility (not compatible with front loading ramps due to the shared storage location unless supplied loose and stored in the towing vehicle) | 290 |
| Swivel jockey mounting kit, required for cross over loading operation | 190 |
| Rear support stands with kick down operation | 120 |
| DECKING | |
| Deck slick pads x4, red - protect soft compound racing tyres from the punched deck | 100 |
| LIGHTING | |
| LED lighting kit, check compatibility of towing vehicle electrics with trailer LED lamps (indicators) | 230 |
| SIDE OPTIONS | |
| Headboard, removable - brush sealed bottom edge for winch operation | 240 |
| STORAGE | |
| Storage box, central bed location, fitted | 210 |
| High level tyre storage and transport rack with securing system and locking cable | 450 |
| LOAD RESTRAINT | |
| Wheel chocks, pair (red), quick release and fully adjustable, professional system engages into trailer chassis | 110 |

See page 16 for details of additional security, safety and load restraint options which are available on all of our ranges.

RACE SHUTTLE

RACE SHUTTLE 2 and 3 STANDARD EQUIPMENT.

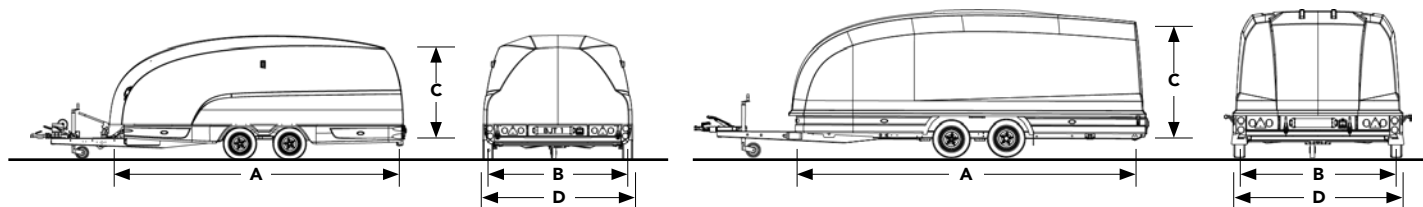

| MODEL | RACE SHUTTLE 2 | | RACE SHUTTLE 3 | | |
|--|----------------|----------|----------------|----------|----------|
| | 300-1010 | 300-1011 | 330-1010 | 330-1011 | 330-1021 |
| PRODUCT CODE | | | | | |
| CAPACITY | | | | | |
| Gross kg | 2,600 | 2,600 | 2,600 | 2,600 | 3,000 |
| Load kg | 1,809 | 1,789 | 1,669 | 1,649 | 2,049 |
| Unladen trailer weight kg | 791 | 811 | 931 | 951 | 951 |
| DIMENSIONS | | | | | |
| Load bed length m A | 4.30 | 4.30 | 4.70 | 4.70 | 4.70 |
| Load bed width m B | 1.95 | 1.95 | 1.95 | 1.95 | 1.95 |
| Overall trailer length m | 5.82 | 5.82 | 6.20 | 6.20 | 6.20 |
| Internal height m C | 1.53 | 1.53 | 1.60 | 1.60 | 1.60 |
| Overall trailer width m D | 2.30 | 2.30 | 2.30 | 2.30 | 2.30 |
| Towball height (loaded, centre of towball) m | 0.40 | 0.40 | 0.40 | 0.40 | 0.40 |
| OPERATION | | | | | |
| Fixed bed | ● | — | ● | — | — |
| Hydraulic tiltbed | — | ● | — | ● | ● |
| Spare wheel | ● | ● | ● | ● | ● |
| REAR LOADING | | | | | |
| Loading ramps 2.40m | ● | ● | ● | ● | ● |
| SECURITY | | | | | |
| Cast steel coupling head + integral high security lock | ● | ● | ● | ● | ● |
| STORAGE | | | | | |
| Storage pockets in sides | — | — | ● | ● | ● |
| EXTERIOR | | | | | |
| Dark grey lower bodywork | ● | ● | ● | ● | ● |
| White high gloss GRP upper body | ● | ● | ● | ● | ● |
| INTERIOR | | | | | |
| LED illumination. Background lighting. | ● | ● | ● | ● | ● |
| WARRANTY | | | | | |
| 5 year extended chassis warranty | ● | ● | ● | ● | ● |
| DELIVERY | | | | | |
| Delivery to a UK dealer | ● | ● | ● | ● | ● |
| PRICE | | | | | |
| £ ex vat | 7,279 | 7,809 | 8,389 | 8,939 | 9,219 |


RACE SHUTTLE 2 and 3

OPTIONAL EQUIPMENT

| WHEELS | £ ex vat |
|---|----------|
| Alloy wheels – 5x (12" Style B2 - Silver) + safety locking wheel bolts | 350 |
| Alloy wheels – 5x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts | 620 |
| WINCHES | |
| Manual winch 2 speed, steel cable and roller guide | 290 |
| Electric winch kit, 4500 lb drag capacity, 12V, wander lead remote control (no power system) | 520 |
| Electric winch kit, 4500 lb drag capacity, 12V, wander lead remote control (includes portable power pack) | 780 |
| STORAGE | |
| Tyre rack + fuel storage station (check suitability for saloon car transportation as clearance under rack is reduced) | 560 |
| LOAD RESTRAINT | |
| Adjustable wheel stop bar – quick release | 140 |

See page 16 for details of additional security, safety and load restraint options which are available on all of our ranges.

RACE SPORT STANDARD EQUIPMENT

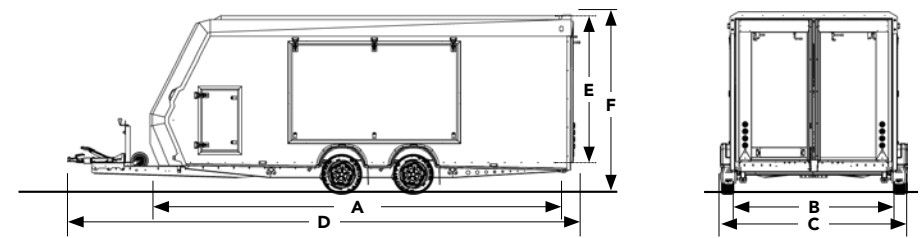

| PRODUCT CODE | 340-4500 | 340-4510 | 340-5000 | 340-5010 | 340-5510 |
|--|--------------|--------------|--------------|--------------|--------------|
| CAPACITY | | | | | |
| Gross kg | 2,600 | 3,000 | 2,600 | 3,000 | 3,000 |
| Load kg | 1,550 | 1,930 | 1,480 | 1,860 | 1,810 |
| Unladen trailer weight kg | 1,050 | 1,070 | 1,120 | 1,140 | 1,190 |
| DIMENSIONS | | | | | |
| Load bed length m A | 4.50 | 4.50 | 5.00 | 5.00 | 5.50 |
| Load bed width m B | 2.00 | 2.00 | 2.00 | 2.00 | 2.10 |
| Overall trailer width m C | 2.38 | 2.38 | 2.38 | 2.38 | 2.48 |
| Overall length m D | 6.06 | 6.06 | 6.56 | 6.56 | 7.06 |
| Internal height (min aperture) m | 1.77 | 1.77 | 1.77 | 1.77 | 1.77 |
| Internal height (to roof) m E | 1.82 | 1.82 | 1.82 | 1.82 | 1.82 |
| Overall trailer height m F | 2.25 | 2.25 | 2.25 | 2.25 | 2.25 |
| Tow-ball height (loaded) m | 0.40 | 0.40 | 0.40 | 0.40 | 0.40 |
| RUNNING GEAR | | | | | |
| Axles | 2 | 2 | 2 | 2 | 2 |
| Wheel / tyre size | 12" (155/70) | 12" (155/70) | 12" (155/70) | 12" (155/70) | 12" (155/70) |
| Spare wheel | ● | ● | ● | ● | ● |
| STANDARD FEATURES | | | | | |
| Rear support legs | ● | ● | ● | ● | ● |
| Front access hatch, left and right (Dimensions 4.5m and 5.0m = 0.85m (H) x 0.5m (W), 5.5m = 1.25m (H) x 0.5m (W)) | ● | ● | ● | ● | ● |
| 'Gullwing' side doors, left and right | ● | ● | ● | ● | ● |
| Twin rear door/ramps with fold-out assistor ramps | ● | ● | ● | ● | ● |
| Centre storage tray | — | — | — | — | ● |
| Daylight roof, full length | ● | ● | ● | ● | ● |
| Punched hi-grip deck left and right | ● | ● | ● | ● | ● |
| Front work shelf | ● | ● | ● | ● | ● |
| Jockey wheel, auto retractable – standard HD | ● | ● | ● | ● | ● |
| SECURITY | | | | | |
| Cast steel coupling head + integral high security lock | ● | ● | ● | ● | ● |
| WARRANTY | | | | | |
| 5 year extended chassis warranty | ● | ● | ● | ● | ● |
| DELIVERY | | | | | |
| Delivery to a UK dealer | ● | ● | ● | ● | ● |
| PRICE | | | | | |
| £ ex vat | 8,469 | 8,949 | 8,619 | 9,089 | 9,989 |

RACE SPORT

OPTIONAL EQUIPMENT

| | £ ex vat |
|--|----------|
| WHEELS | |
| Alloy wheels – 5x (12" Style B2 - Silver) + safety locking wheel bolts | 350 |
| Alloy wheels – 5x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts | 620 |
| WINCHES | |
| Electric winch, 12V operation with steel wire cable, roller fairlead and cable connected remote control - on-board battery | 400 |
| DECKING | |
| Deck slick pads x4, red - protect soft compound racing tyres from the punched deck | 100 |
| LIGHTING | |
| LED Lighting kit - rear lights, check compatibility of towing vehicle electrics with trailer LED lamps (indicators) | 230 |
| STORAGE | |
| Tyre storage and transport rack - high level rack with securing system | 330 |
| Front storage - for 20 litre jerry can x 2 + shelves | 130 |
| Aluminium side storage racks | 230 |
| Aluminium lid kit for centre tray (available on 340-5510 model only) | 210 |
| INTERIOR | |
| Interior light pack, x4 LED Mini strips, centrally mounted overhead | 270 |
| LOAD RESTRAINT | |
| Wheel chocks, pair (red), quick release and fully adjustable, professional system engages into trailer chassis | 110 |
| Wheel chock loading assist, full width wheel chock | 80 |

See page 16 for details of additional security, safety and load restraint options which are available on all of our ranges.

UNIVERSAL OPTIONS

| LOAD RESTRAINT | £ ex vat |
|---|--------------|
| Tie-down straps - blue, set of 4 x wheel 'sling' straps, 2500 DaN/Kg | 130 |
| Tie-down straps - orange, set of 4 x wheel 'sling' straps, 4000 DaN/Kg | 150 |
| Tie-down straps - red, set of 4 x wheel circumference straps, 3000 DaN/Kg (not suitable for Race Shuttle models) | 170 |
| SAFETY | |
| Wheel safety kit - includes torque wrench, 19mm socket and digital tyre pressure gauge | 80 |
| Tyre pressure monitoring system – TPMS by TyrePal in-car monitoring with external sensors (*pricing shown for 1 axle/2 axle/3 axle) | 150/210/270* |
| SECURITY | |
| Datatag kit, provides an asset database registered transponder | 110 |
| Lockfast Bar Kit, 2 point fixing (not suitable for alloy wheels) | 210 |
| Lockfast Bar Kit, 3 point fixing (not suitable for alloy wheels) | 250 |





“THE ONLY DIFFERENCE BETWEEN
ORDINARY AND EXTRAORDINARY IS
THAT LITTLE EXTRA”
JIMMY JOHNSON

BRIAN JAMES TRAILERS

» Connected to you



NOTES

All images used are for illustrative purposes only and may show non-standard equipment and finishes.
All products are subject to change without prior notice due to our continuous development programme.

© BRIAN JAMES TRAILERS LIMITED

Edition 2021Q1-CTUK-PL01

Brian James Trailers Limited.
Sopwith Way, Drayton Fields Industrial Estate
Daventry, Northampton, NN11 8PB

T + 44 (0)1327 308 833

For more information please call or visit our website

www.brianjamestrailers.co.uk