

The 450 and 850 will throw / blow straw 25 meters (82ft), the 330 20 meters (65ft).



The compact 330 can be mounted or trailed to get in and around smaller buildings. The 330 is still tough enough to handle the biggest of bales!!



The extending rear door option on the 850 increases capacity to 4 x big round bales or 2 to 4 x big square bales.

Common Features

- Trailed or mounted. All welded construction, no ledges for material to hang on.
- Swivel chute with 270° of rotation, all electric controls from the tractor cab.
- Rear remote control to tail gate and floor conveyor for easy loading.
- Deep fan, to throw / blow straw, or feed fodder over a barrier or in a feed trough.
- Will handle straw, silage (chopped or baled), hay and haylage, driveline protected by shear bolt, slip & overrun clutch.
- Any shape of round or square bale up to 5ft (1.54M) wide or 3.20 meter (10.40ft) long.

Technical specifications

Model	Capacity	Width	Height	Length	Beaters	Wheel Track	Wheels	Brakes	Weight	Tractor
330 M	2.90m ³	1.92m	2.31m	3.20m	1	N/A	N/A	N/A	1630 Kg	120HP
330 MTC	2.90m ³	1.92m	2.31m	3.20m	1	N/A	N/A	N/A	1770 Kg	120HP
330 T	2.90m ³	2.07m	2.54m	4.28m	1	1.85m	10/75	N/A	1750 Kg	60HP
330T TC	2.90m ³	2.07m	2.54m	4.28m	1	1.85m	10/75	N/A	1890 Kg	60HP
450 T	4.50m ³	2.15m	2.65m	4.36m	1	1.85m	10/75	○	2100 Kg	75 HP
450 TC	4.50m ³	2.15m	2.65m	4.36m	1	1.85m	10/75	○	2200 Kg	75 HP
475 T	4.74m ³	2.26m	3.33m	4.35mm	1	1.90m	12.5/80	○	2340 Kg	95 HP
475 T TC	4.74m ³	2.26m	3.33m	4.35m	1	1.90m	12.5/80	○	2440 Kg	95 HP
850 T	8.5m ³	2.25m	2.65m	5.96m	2	1.90m	12/75	Std	3000 Kg	90 HP
850 T EX	8.5m ³	2.25m	2.65m	5.96m	2	1.90m	12/75	Std	3100 Kg	90 HP

○ = optional

Manufactured by



Kidd Farm Machinery Ltd
 Folly Road . Roundway . Devizes . Wiltshire . SN10 2HT . UK
 Tel: +44 (0)1380 726085 Fax: +44 (0)8709 289552
 E: sales@kiddltd.com
 www.kiddltd.com

BALE SHREDDERS



Efficient
 Versatile
 Durable
 Manoeuvrable



5003760/3 MAP



Product features can be options or standard depending on model:-

- Hydraulically adjustable combe.
- Road lights.
- Wide angle PTO.
- Oversize tyres.
- Mudguards.
- Axle brakes.
- Parking jack.
- Optional concave screen sizes for the TC straw chopping.
- Ring hitch or clevis drawbar.
- Two or three stage swivel chute interchangeable between models.
- Hog chute for chuting straw into pig arcs.

Beater system chops the bale and feeds bit size chunks into the chopping mechanism and fan.



The 330, 450 and 850 will drop silage chopped or baled over a barrier.



The 330, 450 and 850 will put silage chopped or baled to the side on the floor or in a feed trough.

BALE SHREDDERS



330M

The 330 M is a mounted machine 4ft 6in (1.38m) wide for feeding hay, haylage, silage or shredding and chopping straw. Can be supplied as a shredder or TC twin chop option

330T

The 330 T is a trailed machine 4ft 6in (1.38m) wide for feeding hay, haylage, silage or shredding and chopping straw. Can be supplied as a shredder or TC twin chop option.



475 TC

The 475 will shred and spread straw for bedding or chop straw (from 20 to 60mm) for bedding or a TMR ration. The 475 will distribute green material for feeding, baled or loose.




450T

The 450 T is a trailed machine 5ft 6in (1.69m) wide for feeding hay, haylage, silage or shredding and chopping straw. Can be supplied as a shredder or TC twin chop option.



850T

The 850 T is a trailed machine 5ft 6in (1.69m) wide twin beater machine for feeding hay, haylage, silage or shredding and chopping straw. Two to four large square bales or four big round bales.

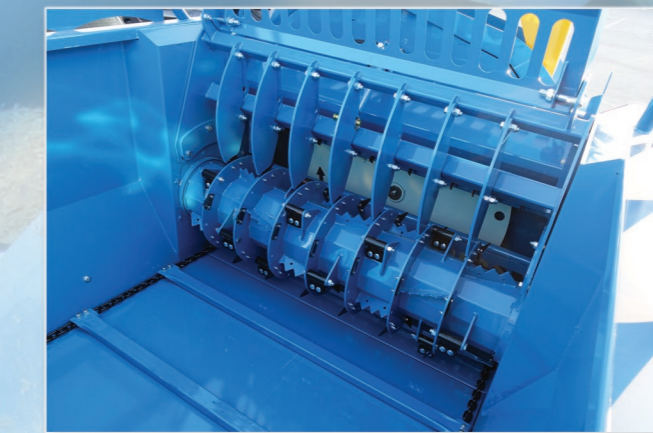

Shredded straw for bedding.



At the touch of a button chop straw short for pumping, animal feed ration or poultry litter.



Twin Chop (TC) system

330, 450 & 475 range offer short chopping options in straw and will also distribute Hay and Silage for feeding. Straw can be just shredded for bedding or chopped short to a regular length as part of a feed ration or for bedding dairy cows and poultry housing. With the touch of a switch in the tractor cab the chopping mechanism is moved into the path of the straw flow to be chopped. The chopping mechanism is protected by shear bolts and flails that break back. Foreign bodies are collected in the trap at the rear of the machine.



Concave for chopping straw, available in different sizes.



Primary chopping knives, shear bolt protected.