Powered by **Innovation**



DOOSAN



HB series

5REASONS TO USE DOOSAN BREAKERS



Performance

Doosan HB Breakers offer powerful performance and top notch productivity-whether you are demolishing concrete or breaking rocks.



Engineering Approved

HB series are optimized for Doosan excavators, fully certified by Doosan engineering.



One-Stop Service

Same as Doosan excavators, Doosan breakers will covered by strong Doosan service network and Doosan product specialists, providing "One-stop service" experience.



Warranty

Avoid compatibility and warranty coverage arguments from using Non-approved breaker.

Doosan offers standard Warranty up to 2 Years.




Price

Even with 2-year warranty, HB-series are offered at reasonable price, providing customer benefits in total cost of ownership.



FEATURES & BENEFITS

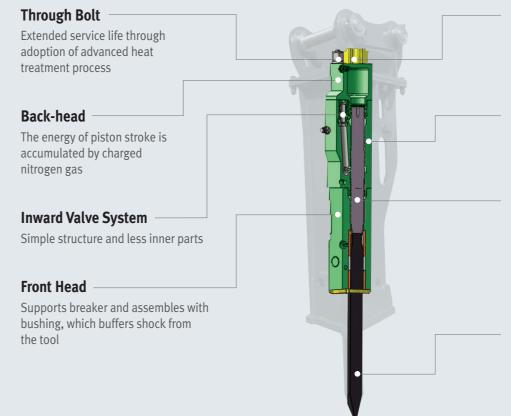

Urethane Dampper

Vibration dampening prevents Carrier damage and improves operator comport

Cylinder

Unique heat treatment process ensures stable quality

Piston

Quality and durability was drastically enhanced as result of quality proven material in terms of anti-wear, heat resistance, anti-impact, pressure resistance strength etc

Chisel

Doosan genuine working tool ensures Doosan hyd. Breaker's performance and productivity

HB03 / HB04 / HB06 / HB08 / HB15



HB series



| Item | Model | HB03 | HB04 | HB06 | HB08 | HB15 |
|-------------------------------|----------|---------------|----------------|------------------------|-------------|--|
| Total Weight | kg | 100 | 150 | 300 | 390 | 900 |
| Length | mm | 1107 | 1210 | 1390 | 1491 | 2065 |
| Width | mm | 260 | 260 | 328 | 328 | 440 |
| Height | mm | 298 | 298 | 400 | 400 | 520 |
| | kg / cm² | 90 - 120 | 90 - 120 | 110 - 140 | 120 - 150 | 150 - 170 |
| Operating Pressure | psi | 1280 - 1700 | 1280 - 1700 | 1562 - 1988 | 1704 - 2130 | 2130 - 2414 |
| | bar | 88 -117 | 88 - 117 | 108 - 137 | 118 - 147 | 147 - 166 |
| Hydraulic Flow Range | l / min | 20 - 30 | 25 - 50 | 40 - 70 | 50 - 90 | 80 - 110 |
| Impact Frequency | bpm | 700 - 1200 | 600 - 1100 | 500 - 900 | 400 - 800 | 350 - 700 |
| Diameter of Hose | mm | 12.7 | 12.7 | 12.7 | 12.7 | 19.05 |
| | inch | 1 / 2 | 1 / 2 | 1 / 2 | 1 / 2 | 3 / 4 |
| Diameter of Tool | mm | 45 | 53 | 60 | 75 / 80 | 100 |
| Weight of Tool | kg | 8 | 9 | 18 | 26 | 57 |
| Suitable Carrier | ton | 1.2 - 3.0 | 2.5 - 4.5 | 4 -7 | 6 -9 | 10 - 15 |
| Matching Doosan excavators | | DX17Z DX19 | DX27Z DX35Z | DX57W DX62R DX63 | DX85R | DX140LC DX140LCR DX140W DX160LC DX160W DX165W |

BRACKET TYPE



HOUSING (LOW NOISE)

Recommended for professional contractors working in urban zones, where noise level must be controlled or where local regulation may require silenced breakers

- Low noise (120 dB)
- Less vibration due to urethane damper inside

TOOL SELECTION

USE THE RIGHT TOOL FOR THE RIGHT JOB

Breaker Tool (Chisel) is a wear part and tool consumption is the main causative for wear part costs. It is important to select an appropriate tool according to the nature of work and the characteristics of the object to break. Genuine Doosan tools are designed to best fit Doosan breakers.



MOIL POINT

Demolition Hard Ground Hard Ground with Failures Concrete



PYRAMIDAL

Reinforced Concrete

Trenching General Excavation Asphalt Soft Ground with Faults Concrete



WEDGE

Trenching General Excavation Soft Ground with Faults Concrete Reinforced Concrete



Block Splitting

BLUNT

Conpact Abrasive Difficult to Position Concrete Slabon Demolition

PARTS & WARRANTY

GENUINE PARTS

Easy maintenance, less downtime! Minimizing downtime gives you the edge when it comes to productivity.





Doosan offers you 2 Year Standard Warranty on all major components as standard for no extra cost. Warranty terms for wear parts vary between 6 to 12 months.