Technical sheet :


MI 50 G ST5



MANITOU
HANDLING YOUR WORLD

	Technical characteristics		Metric
1.1	Manufacturer		Manitou
1.2	Model Name		MI 50 G ST5
1.3	Power source		LPG
1.4	Operator type		Seated
1.5	Max. capacity	Q	5000 kg
1.6	Load center of gravity	c	500 mm
1.8	Load distance, centre of drive axle to fork	x	560 mm
1.9	Wheelbase	y	2150 mm
	Weight		
2.1	Service weight		6930 kg
2.2	Weight on front axle (laden) / rear axle (laden)		10510 kg / 1420 kg
2.3	Weight on front axle (Unladen) / rear axle (Unladen)		3100 kg / 3830 kg
	Wheels		
3.1	Tires type		Pneumatic
3.2	Dimensions of front wheels		300-15-18PR
3.3	Dimensions of rear wheels		7.00-12-12PR
3.5	Number of front wheels / rear wheels		2 / 2
3.5.2	Number of drive wheels		2
3.6	Front wheel gauge	b10	1190 mm
3.7	Rear wheel gauge	b11	1130 mm
	Dimensions		
4.8	Seat height/stand height	h7	1370 mm
4.7	Height of overhead guard (cabin)	h6	2390 mm
4.12	Height of towing bar (coupling height)	h10	445 mm
4.19	Overall length	l1	4470 mm
4.20	Length to face of forks	l2	3250 mm
4.21	Overall width	b1	1490 mm
4.21	Overall width - Single wheels	b1	1490 mm
4.21	Overall width - Twinned wheels	b1	1940 mm
4.22	Forks section / width / length	s / e / l	50 mm x 150 mm x 1220 mm
4.23	Fork carriage ISO 2328 (class/form) A/B		3A
4.24	Fork carriage width	b3	1250 mm
4.31	Ground clearance below mast	m1	170 mm
4.32	Ground clearance at centre of wheelbase	m2	230 mm
4.33	Aisle Width for pallets 1000 x 1200 crossways	Ast	4475 mm
4.34	Aisle width for 800 x 1200 pallet lengthways	Ast	4675 mm
4.35	Turning radius	Wa	2920 mm
4.36	Internal turning radius (over tyres)	b13	130 mm
	Performances		
5.1	Travel speed (laden / unladen)		21 km/h-22 km/h
5.2	Lifting speed (laden / unladen)		0.43 m/s-0.46 m/s
5.3	Lowering speed (laden / unladen)		0.50 m/s-0.50 m/s
5.5	Drawbar pull (Laden / Unladen)		3800 daN / 2300 daN
5.7	Gradeability (laden / unladen)		22 % / 32 %
5.10	Service brake		Oil bath
	Transmission type		Torque converter
	Engine		
7.1	Engine brand / model / norm		Kubota / WG 3800 / Stage V
7.2	Engine power (Hp / kW)		83 Hp/61 kW
7.3	Rated speed		2300 rpm
7.4	Number of cylinders / Capacity of cylinders		4 - 3769 cm³
	Miscellaneous		
8.2	Working hydraulic pressure for attachments		190 bar
8.3	Oil flow rate for attachments		55 l/min
8.4	Measured/guaranteed mean noise level at the ear of the operator		< 83 dB

MI 50 G ST5 - Dimensional drawing

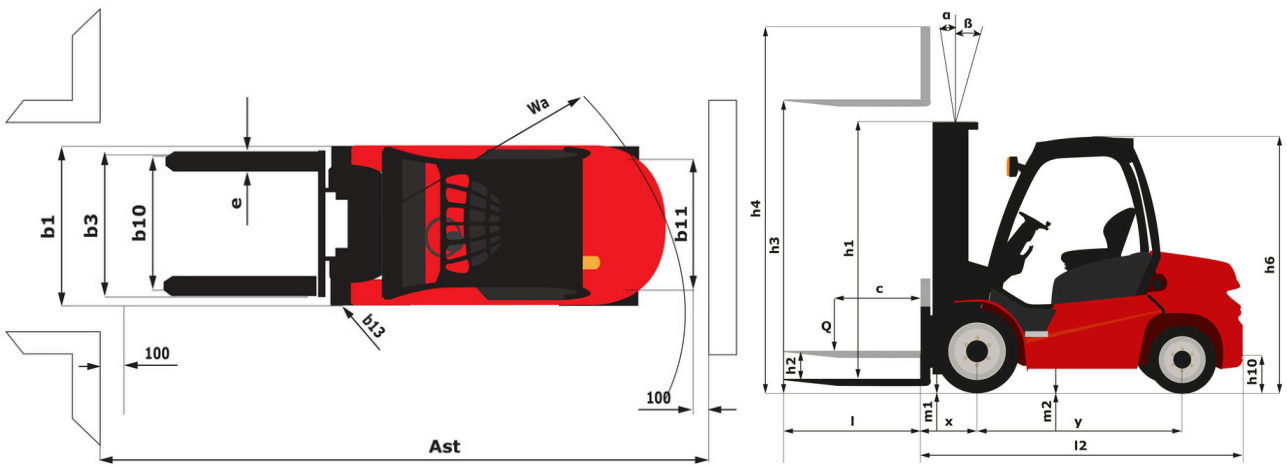

Characteristics of masts and residual capacities

Full Visibility Duplex (FVD)		FVD 30	FVD 33	FVD 35	FVD 37	FVD 40	FVD 45	FVD 50
α - Mast/fork carriage tilt, forward	°	6.20	6.20	6.20	6.20	6.20	6.20	6.20
β - Mast/fork carriage tilt, backward	°	12.20	12.20	12.20	12.20	12.20	12.20	12.20
h1 - Mast lowered height	mm	2245	2395	2495	2595	2795	3070	3345
h2 - Mast free lift	mm	160	160	160	160	160	160	160
h3 - Mast lifting height	mm	3000	3300	3500	3700	4000	4500	5000
h4 - Mast extended height	mm	4365	4665	4865	5065	5365	5865	6365
Residual capacity at max height	kg	5000	5000	5000	5000	5000	4700	4100
Residual capacity with integrated side shift at max heigth	kg	5000	5000	5000	5000	5000	4600	4000
Height at max capacity	mm	3000	3300	3500	3700	4000	4000	4000
Height at max capacity with integrated sideshift	mm	3000	3300	3500	3700	4000	4000	4000

Free Lift Duplex (FLD)		FLD 30	FLD 33	FLD 35	FLD 37
α - Mast/fork carriage tilt, forward	°	6.20	6.20	6.20	6.20
β - Mast/fork carriage tilt, backward	°	12.20	12.20	12.20	12.20
h1 - Mast lowered height	mm	2226	2376	2476	2576
h2 - Mast free lift	mm	1364	1514	1614	1714
h3 - Mast lifting height	mm	3000	3300	3500	3700
h4 - Mast extended height	mm	4365	4665	4865	5065
Residual capacity at max height	kg	5000	5000	5000	5000
Residual capacity with integrated side shift at max heigth	kg	5000	5000	5000	5000
Height at max capacity	mm	3000	3300	3500	3700
Height at max capacity with integrated sideshift	mm	3000	3300	3500	3700

Free Lift Triplex (FLT)		FLT 40	FLT 43	FLT 45	FLT 47	FLT 50	FLT 55	FLT 60
α - Mast/fork carriage tilt, forward	°	6.20	6.20	6.20	6.20	6.20	3.20	3.20
β - Mast/fork carriage tilt, backward	°	12.20	6.20	6.20	6.20	6.20	6.20	6.20
h1 - Mast lowered height	mm	2080	2180	2248	2310	2410	2575	2790
h2 - Mast free lift	mm	1222	1322	1390	1452	1552	1718	1932
h3 - Mast lifting height	mm	4000	4300	4500	4700	5000	5500	6000
h4 - Mast extended height	mm	5365	5665	5880	6070	6370	6870	7380
Residual capacity at max height	kg	4850	4700	4600	4300	3900	3400	2700
Residual capacity with integrated side shift at max heigth	kg	4750	4600	4500	4200	3800	3300	2600
Height at max capacity	mm	2500	2500	2500	2500	2500	2500	2500

Head Office
B.P. 249 - 430 rue de l'Aubinière
44150 Ancenis Cedex - France
Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97
www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.
MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes